



Camp Collar Resort Shirt

A relaxed unisex short-sleeve button-down with a convertible notched collar and chest pocket

Garment Type: Short-Sleeve Shirt | Difficulty: Confident Beginner | Provenance: Threadline Open Design Studio | License: CC BY-SA 4.0

PRINTER CALIBRATION & SCALE VERIFICATION

Measure both test squares with a rigid ruler before cutting fabric. Print at 100% scale without shrinking.

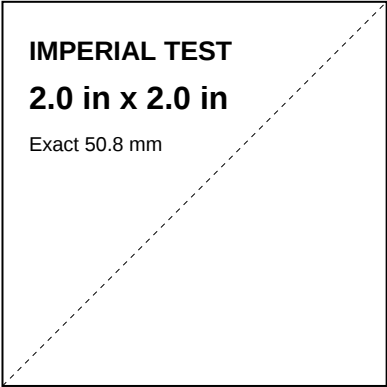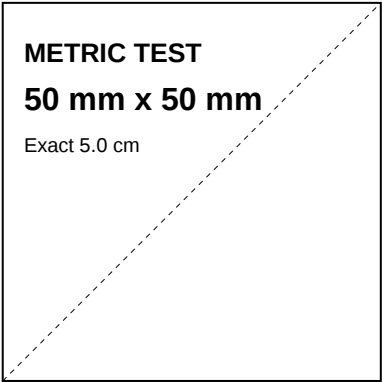

- Scale Rules:
- 1. Open in Acrobat Reader
 - 2. Select Actual Size 100%
 - 3. Do NOT Fit to Page
 - 4. Verify dimensions above

SIZE SELECTION & EASE RECOMMENDATIONS

This shirt is drafted with 16 cm 6.3" of built-in positive ease across the chest for an easy, breezy boxy silhouette. If you prefer a trimmer streetwear fit, choose one size smaller than your body bust measurement.

Generous positive ease of +16 cm +6.3" at bust and +12 cm +4.7" at hem. Designed to be worn loose and breezy over skin or a base tank.

STANDARD BODY MEASUREMENTS CHART

Size Range	XS	S	M	L	XL	2XL	3XL
Full Bust/Chest	80 cm	86 cm	94 cm	102 cm	112 cm	122 cm	132 cm
Full Hip / Seat	88 cm	94 cm	102 cm	110 cm	120 cm	130 cm	142 cm

FINISHED MEASUREMENTS & MATERIALS

FINISHED GARMENT MEASUREMENTS (INCLUDES DESIGN EASE)

Dimension	XS	S	M	L	XL	2XL	3XL
Finished Chest	96 cm	102 cm	110 cm	118 cm	128 cm	138 cm	148 cm
Hem Sweep	100 cm	106 cm	114 cm	122 cm	132 cm	142 cm	152 cm
Garment Length	62 cm	63.5 cm	65 cm	66.5 cm	68 cm	69.5 cm	71 cm

FABRIC REQUIREMENTS (45 IN / 115 CM & 60 IN / 150 CM BOLTS)

Bolt Width	XS	S	M	L	XL	2XL	3XL
45" / 115 cm Fabric	2 yd	2 yd	2 yd	2.3 yd	2.3 yd	2.6 yd	2.6 yd
60" / 150 cm Fabric	1.5 yd	1.5 yd	1.5 yd	1.8 yd	1.8 yd	2.1 yd	2.1 yd

RECOMMENDED FABRICS & STRETCH PROPERTIES

Recommended Substrates: 100% Washed Linen 140 165 gsm for casual breathable structure, Tencel or Lyocell twill for fluid movement and subtle sheen, Cotton lawn, poplin, or seersucker for crisp classic tailoring, Rayon challis or viscose for breezy drape. Stretch Requirement: None 0% stretch - stable woven.

NOTIONS & SEWING TOOLS CHECKLIST

- [] 5 to 6 shirt buttons 12 15 mm / 1/2 in
- [] Fusible featherweight interfacing 0.5 m / 0.6 yd for collar and facing
- [] Matching all-purpose sewing thread
- [] Sharp fabric shears
- [] Measuring tape
- [] Iron and pressing ham

PATTERN INVENTORY & CUTTING LAYOUT

STANDARD SEAM & HEM ALLOWANCES

Use the seam and hem allowances printed on each pattern piece. Verify every allowance label before cutting fabric.

PATTERN PIECE INVENTORY & CUTTING SCHEDULE

Piece Name	Cut Quantity	Material / Interfacing
Front Bodice with Placket	Cut 1 pair	Main Fabric
Back Bodice on Fold	Cut 1 on fold	Main Fabric
Camp Collar	Cut 2 (1 interfaced)	Main Fabric
Short Sleeve	Cut 1 pair	Main Fabric
Chest Pocket	Cut 1	Main Fabric

FABRIC PREPARATION & CUTTING RULES

- Pre-wash and press fabric to eliminate shrinkage prior to cutting.
- Align grainlines parallel to selvage.
- Apply fusible interfacing to upper collar piece and front facing extensions.

MULTI-PAGE TILE ASSEMBLY INSTRUCTIONS

1. Check Sheet 1 calibration square before printing the remaining pattern sheets.
2. Trim right and bottom border lines along the dashed perimeter frame.
3. Match corner crosshairs, such as A1 to A2 and B1 to B2, without overlapping.
4. Tape sheets securely on both sides before cutting paper pieces.

STEP-BY-STEP SEWING INSTRUCTIONS

Step 1: Prepare Pocket & Front Bodice

Press top pocket hem under 1 cm then 2 cm, topstitch. Press side/bottom seam allowances under 1 cm. Pin pocket to Left Front and edgestitch in place.

Step 2: Shoulder Seams

Pin Front and Back bodices right sides together at shoulders. Stitch with 1.5 cm allowance, finish seams, and press toward back.

Step 3: Assemble & Attach Camp Collar

Stitch collar pieces right sides together along outer notched edges. Trim corners, turn right side out, and press. Sandwich collar between neckline and turned facings. Stitch and press.

Step 4: Attach Sleeves Flat

Pin sleeve cap to armhole matching center notch to shoulder seam. Stitch seam with 1.5 cm allowance and finish.

Step 5: Side Seams & Side Vents

Stitch side and sleeve seams in one continuous line, stopping 8 cm above hem to create side vents. Press seam open.

Step 6: Hemming & Buttonholes

Press double-fold hem at sleeves and bottom edge. Stitch. Sew vertical buttonholes on right front and attach buttons to left front.

TROUBLESHOOTING & PRO SEWING TIPS

Issue: Collar lapel does not lie flat

Fix: Clip diagonal notch at break point and steam press thoroughly over tailor ham.

Issue: Pocket corners look uneven

Fix: Use a cardstock template to press pocket edges before stitching.