



Ribbed Button Henley

A classic fitted long-sleeve knit top with a working 3-button front placket and scoop neck

Garment Type: Knit Top | Difficulty: Intermediate | Provenance: Threadline Open Design Studio | License: CC BY-SA 4.0

PRINTER CALIBRATION & SCALE VERIFICATION

Measure both test squares with a rigid ruler before cutting fabric. Print at 100% scale without shrinking.

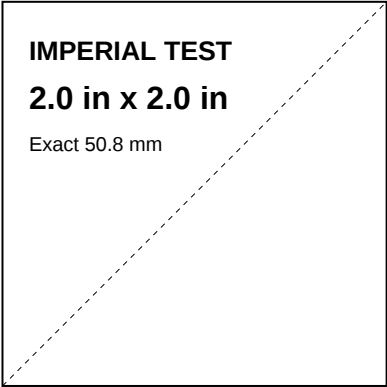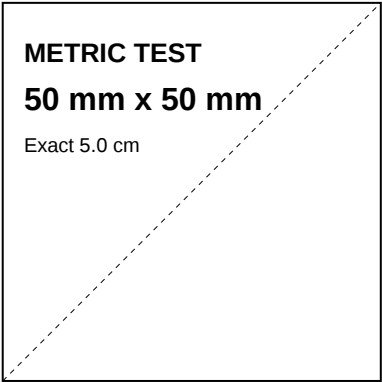

- Scale Rules:
- 1. Open in Acrobat Reader
 - 2. Select Actual Size 100%
 - 3. Do NOT Fit to Page
 - 4. Verify dimensions above

SIZE SELECTION & EASE RECOMMENDATIONS

Designed with zero ease at bust. Select exact body measurement size for a neat fit.

Zero bust ease designed to contour your torso naturally with ribbed elasticity.

STANDARD BODY MEASUREMENTS CHART

Size Range	XS	S	M	L	XL	2XL	3XL
Full Bust/Chest	80 cm	86 cm	94 cm	102 cm	112 cm	122 cm	132 cm
Full Hip / Seat	88 cm	94 cm	102 cm	110 cm	120 cm	130 cm	142 cm

FINISHED MEASUREMENTS & MATERIALS

FINISHED GARMENT MEASUREMENTS (INCLUDES DESIGN EASE)

Dimension	XS	S	M	L	XL	2XL	3XL
Finished Chest	80 cm	86 cm	94 cm	102 cm	112 cm	122 cm	132 cm
Hem Sweep	82 cm	88 cm	96 cm	104 cm	114 cm	124 cm	134 cm
Garment Length	59 cm	60.5 cm	62 cm	63.5 cm	65 cm	66.5 cm	68 cm

FABRIC REQUIREMENTS (45 IN / 115 CM & 60 IN / 150 CM BOLTS)

Bolt Width	XS	S	M	L	XL	2XL	3XL
45" / 115 cm Fabric	1.9 yd	1.9 yd	1.9 yd	2.2 yd	2.2 yd	2.5 yd	2.5 yd
60" / 150 cm Fabric	1.4 yd	1.4 yd	1.4 yd	1.6 yd	1.6 yd	2 yd	2 yd

RECOMMENDED FABRICS & STRETCH PROPERTIES

Recommended Substrates: Thermal waffle knit 200 260 gsm for authentic heritage texture, Cotton-spandex 2x2 rib knit for curve-hugging comfort, Bamboo rib jersey for ultra-soft breathable feel. Stretch Requirement: 40% horizontal stretch with good recovery.

NOTIONS & SEWING TOOLS CHECKLIST

- ☐ 3 buttons 12 mm
- ☐ Fusible knit interfacing for placket 0.2 m
- ☐ Stretch needle size 80/12
- ☐ Sharp fabric shears
- ☐ Measuring tape
- ☐ Iron and pressing ham

PATTERN INVENTORY & CUTTING LAYOUT

STANDARD SEAM & HEM ALLOWANCES

Use the seam and hem allowances printed on each pattern piece. Verify every allowance label before cutting fabric.

PATTERN PIECE INVENTORY & CUTTING SCHEDULE

Piece Name	Cut Quantity	Material / Interfacing
Front Bodice with Placket Slit	Cut 1 on fold	Main Fabric
Back Bodice on Fold	Cut 1 on fold	Main Fabric
Long Sleeve	Cut 1 pair	Main Fabric
Henley Placket Strips	Cut 2 (interfaced)	Main Fabric
Neck Binding	Cut 1	Main Fabric

FABRIC PREPARATION & CUTTING RULES

- Interface placket strips with lightweight knit interfacing.

MULTI-PAGE TILE ASSEMBLY INSTRUCTIONS

1. Check Sheet 1 calibration square before printing the remaining pattern sheets.
2. Trim right and bottom border lines along the dashed perimeter frame.
3. Match corner crosshairs, such as A1 to A2 and B1 to B2, without overlapping.
4. Tape sheets securely on both sides before cutting paper pieces.

STEP-BY-STEP SEWING INSTRUCTIONS

Step 1: Construct Henley Placket

Slash front neck slit on front bodice. Stitch right and left placket strips right sides together, fold over, and box-topstitch at bottom tab. Press seam allowances.

Step 2: Shoulder Seams & Neck Binding

Align front bodice and Back Bodice on Fold right sides together. Stitch shoulder seams and press seam allowances. Apply narrow knit binding along neckline right sides together up to placket edges and topstitch.

Step 3: Insert Sleeves and Side Seams

Insert long sleeves flat into armholes right sides together. Stitch side seams right sides together down to hem, and press seam allowances.

Step 4: Buttonholes and Hemming

Sew vertical buttonholes on top placket and attach buttons. Turn under sleeve and bottom hems, press seam allowances, and stitch with twin needle.

TROUBLESHOOTING & PRO SEWING TIPS

Issue: Placket base puckers

Fix: Clip diagonal notches precisely to stitch corners at base of placket.