



Wrap Ballet Top

An elegant crossover ballet top with long waist wrap ties, V-neckline, and 3/4 sleeves

Garment Type: Knit Top | Difficulty: Confident Beginner | Provenance: Threadline Open Design Studio | License: CC BY-SA 4.0

PRINTER CALIBRATION & SCALE VERIFICATION

Measure both test squares with a rigid ruler before cutting fabric. Print at 100% scale without shrinking.

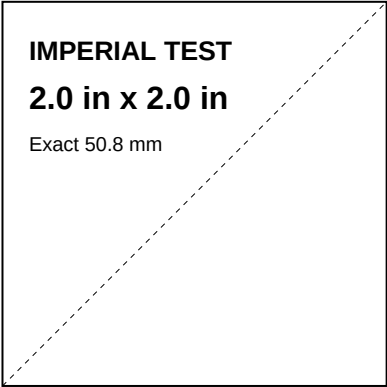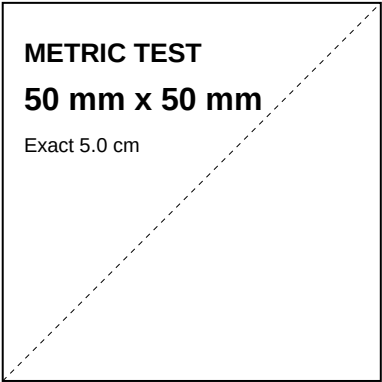

- Scale Rules:
- 1. Open in Acrobat Reader
 - 2. Select Actual Size 100%
 - 3. Do NOT Fit to Page
 - 4. Verify dimensions above

SIZE SELECTION & EASE RECOMMENDATIONS

The wrap styling allows custom adjustment over the bust and waist. Select size based on full bust.

Adjustable wrap styling accommodates body contours smoothly with 0 to +4 cm ease.

STANDARD BODY MEASUREMENTS CHART

Size Range	XS	S	M	L	XL	2XL	3XL
Full Bust/Chest	80 cm	86 cm	94 cm	102 cm	112 cm	122 cm	132 cm
Full Hip / Seat	88 cm	94 cm	102 cm	110 cm	120 cm	130 cm	142 cm

FINISHED MEASUREMENTS & MATERIALS

FINISHED GARMENT MEASUREMENTS (INCLUDES DESIGN EASE)

Dimension	XS	S	M	L	XL	2XL	3XL
Finished Chest	80 cm	86 cm	94 cm	102 cm	112 cm	122 cm	132 cm
Hem Sweep	76 cm	82 cm	90 cm	98 cm	108 cm	118 cm	128 cm
Garment Length	48 cm	49.5 cm	51 cm	52.5 cm	54 cm	55.5 cm	57 cm

FABRIC REQUIREMENTS (45 IN / 115 CM & 60 IN / 150 CM BOLTS)

Bolt Width	XS	S	M	L	XL	2XL	3XL
45" / 115 cm Fabric	2.1 yd	2.1 yd	2.1 yd	2.4 yd	2.4 yd	2.7 yd	2.7 yd
60" / 150 cm Fabric	1.6 yd	1.6 yd	1.6 yd	1.9 yd	1.9 yd	2.2 yd	2.2 yd

RECOMMENDED FABRICS & STRETCH PROPERTIES

Recommended Substrates: Bamboo or modal spandex jersey 200 240 gsm, Cotton-spandex stretch rib or jersey, Viscose elastane jersey for fluid drape. Stretch Requirement: 40% 4-way stretch with high recovery.

NOTIONS & SEWING TOOLS CHECKLIST

- ☐ Stretch sewing machine needle size 75/11
- ☐ Matching polyester thread
- ☐ Sharp fabric shears
- ☐ Measuring tape
- ☐ Iron and pressing ham

PATTERN INVENTORY & CUTTING LAYOUT

STANDARD SEAM & HEM ALLOWANCES

Use the seam and hem allowances printed on each pattern piece. Verify every allowance label before cutting fabric.

PATTERN PIECE INVENTORY & CUTTING SCHEDULE

Piece Name	Cut Quantity	Material / Interfacing
Right Front Bodice with Tie	Cut 1	Main Fabric
Left Front Bodice with Tie	Cut 1	Main Fabric
Back Bodice on Fold	Cut 1 on fold	Main Fabric
3/4 Sleeve	Cut 1 pair	Main Fabric
Neckline Binding Strip	Cut 1	Main Fabric

FABRIC PREPARATION & CUTTING RULES

- Mark side seam tie pass-through opening on right side seam.

MULTI-PAGE TILE ASSEMBLY INSTRUCTIONS

1. Check Sheet 1 calibration square before printing the remaining pattern sheets.
2. Trim right and bottom border lines along the dashed perimeter frame.
3. Match corner crosshairs, such as A1 to A2 and B1 to B2, without overlapping.
4. Tape sheets securely on both sides before cutting paper pieces.

STEP-BY-STEP SEWING INSTRUCTIONS

Step 1: Shoulder Seams

Align front bodices and Back Bodice on Fold right sides together. Stitch shoulder seams with clear elastic reinforcement. Press seam allowances toward back.

Step 2: Bind Wrap Necklines

Apply neckband along continuous front wrap edge and back neckline. Turn and stitch with stretch stitch.

Step 3: Insert Sleeves & Close Side Seams

Insert 3/4 sleeves flat into armholes right sides together. Stitch left side seam continuously right sides together. On right side seam, leave 3 cm opening for tie pass-through. Press seam allowances.

Step 4: Hem Sleeves and Waist

Turn under 2 cm hem allowances on bottom edges and sleeves, press seam allowances, and stitch with twin needle.

TROUBLESHOOTING & PRO SEWING TIPS

Issue: Front wrap gapes open

Fix: Stretch neckband 10% more firmly along the diagonal bust curve.