



Sandy Full Circle Skirt

Sandy Full Circle Skirt Verified open pattern specification

Garment Type: Circle Skirt | Difficulty: Beginner | Provenance: FreeSewing | License: MIT / CC BY 4.0

PRINTER CALIBRATION & SCALE VERIFICATION

Measure both test squares with a rigid ruler before cutting fabric. Print at 100% scale without shrinking.

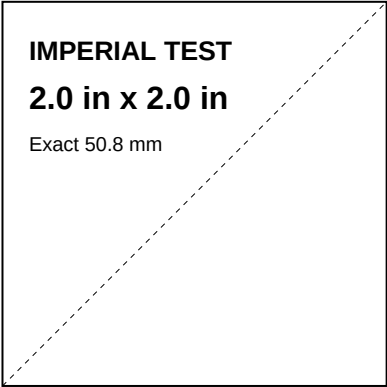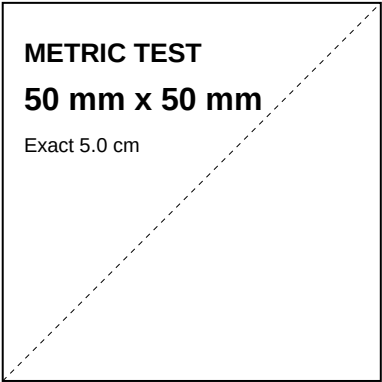

- Scale Rules:
- 1. Open in Acrobat Reader
 - 2. Select Actual Size 100%
 - 3. Do NOT Fit to Page
 - 4. Verify dimensions above

SIZE SELECTION & EASE RECOMMENDATIONS

Select size based on natural waist and fullest hip measurement.
Zero ease required through skirt drape; waistband features +2 cm wearing ease.

STANDARD BODY MEASUREMENTS CHART

Size Range	XS	S	M	L	XL	2XL	3XL
Natural Waist	62 cm	68 cm	74 cm	80 cm	90 cm	100 cm	110 cm
Full Hip / Seat	88 cm	94 cm	100 cm	106 cm	116 cm	126 cm	136 cm

FINISHED MEASUREMENTS & MATERIALS

FINISHED GARMENT MEASUREMENTS (INCLUDES DESIGN EASE)

Dimension	XS	S	M	L	XL	2XL	3XL
Finished Waist	67 cm	75 cm	83 cm	91 cm	101 cm	111 cm	121 cm
Finished Hip	125 cm	133 cm	141 cm	149 cm	159 cm	169 cm	179 cm
Garment Length	65 cm	66 cm	66 cm	67 cm	67 cm	68 cm	68 cm

FABRIC REQUIREMENTS (45 IN / 115 CM & 60 IN / 150 CM BOLTS)

Bolt Width	XS	S	M	L	XL	2XL	3XL
45" / 115 cm Fabric	3.5 yd	3.5 yd	3.5 yd	3.95 yd	3.95 yd	4.35 yd	4.35 yd
60" / 150 cm Fabric	2.4 yd	2.4 yd	2.4 yd	2.75 yd	2.75 yd	3.05 yd	3.05 yd

RECOMMENDED FABRICS & STRETCH PROPERTIES

Recommended Substrates: Lightweight to medium-weight suitable fabric substrates, Pre-washed natural fibers cotton, linen, or bamboo. Stretch Requirement: None 0% stable woven.

NOTIONS & SEWING TOOLS CHECKLIST

- ☐ Matching all-purpose polyester or cotton sewing thread
- ☐ Universal sewing needle size 80/12
- ☐ 7 inch invisible zipper
- ☐ Hook and eye closure
- ☐ Fusible waistband interfacing
- ☐ Sharp fabric shears
- ☐ Measuring tape
- ☐ Iron and pressing ham

PATTERN INVENTORY & CUTTING LAYOUT

STANDARD SEAM & HEM ALLOWANCES

Use the seam and hem allowances printed on each pattern piece. Verify every allowance label before cutting fabric.

PATTERN PIECE INVENTORY & CUTTING SCHEDULE

Piece Name	Cut Quantity	Material / Interfacing
Full Circle Skirt Panels	Cut 2 Half-Circles	Main Fabric
Contoured Waistband	Cut 2 in Fabric, Cut 1 in Fusible Interfacing	Main Fabric

FABRIC PREPARATION & CUTTING RULES

- Press fabric before cutting to remove packing folds and pre-shrink fibers.
- Align piece grainlines strictly parallel to fabric selvages.
- Transfer notch markings with small 3 mm snips into the seam allowance margin.

MULTI-PAGE TILE ASSEMBLY INSTRUCTIONS

1. Check Sheet 1 calibration square before printing the remaining pattern sheets.
2. Trim right and bottom border lines along the dashed perimeter frame.
3. Match corner crosshairs, such as A1 to A2 and B1 to B2, without overlapping.
4. Tape sheets securely on both sides before cutting paper pieces.

STEP-BY-STEP SEWING INSTRUCTIONS

Step 1: Staystitch Waist Curve

Immediately staystitch circular waist opening at 8 mm to prevent bias stretching while handling.

Step 2: Stitch Side Seams & Insert Zipper

Stitch left side seam right sides together and press seam allowances open. On right side seam, install invisible zipper down to hip notch and stitch remaining seam to hem.

Step 3: Attach Interfaced Waistband

Apply interfacing to waistband. Attach outer waistband to skirt waistline right sides together. Turn inner waistband under and stitch in the ditch.

Step 4: Hang Skirt Before Hemming

Hang skirt on a hanger for 24 hours to allow circular bias fibers to drop and settle naturally.

Step 5: Level and Hem

Measure hem from floor evenly all around. Trim excess and sew a narrow 6 mm baby rolled hem.

TROUBLESHOOTING & PRO SEWING TIPS

Issue: Seams puckering along stitch line

Fix: Insert fresh needle and test balance on fabric scrap.

Issue: Wavy edge along curved perimeter

Fix: Staystitch immediately after cutting and use walking foot.