



Waralee Wrap Pants

Waralee Wrap Pants Verified open pattern specification

Garment Type: Wrap Pants | Difficulty: Beginner | Provenance: FreeSewing | License: MIT / CC BY 4.0

PRINTER CALIBRATION & SCALE VERIFICATION

Measure both test squares with a rigid ruler before cutting fabric. Print at 100% scale without shrinking.

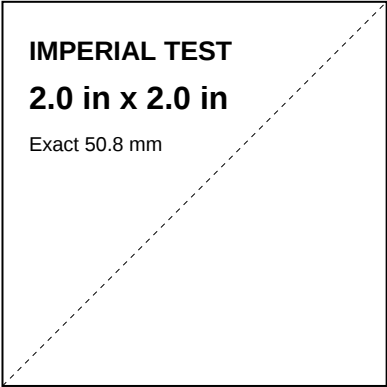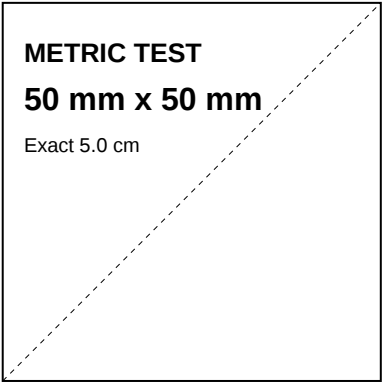

- Scale Rules:
1. Open in Acrobat Reader
 2. Select Actual Size 100%
 3. Do NOT Fit to Page
 4. Verify dimensions above

SIZE SELECTION & EASE RECOMMENDATIONS

Select size corresponding to natural waist and full hip/seat measurements. If between sizes, choose the larger size and adjust side seams.

Generous wrap-around ease adjustable to any waist size via integrated wrap tie belts.

STANDARD BODY MEASUREMENTS CHART

Size Range	XS	S	M	L	XL	2XL	3XL
Natural Waist	64 cm	72 cm	80 cm	88 cm	96 cm	104 cm	112 cm
Full Hip / Seat	90 cm	98 cm	106 cm	114 cm	122 cm	130 cm	138 cm

FINISHED MEASUREMENTS & MATERIALS

FINISHED GARMENT MEASUREMENTS (INCLUDES DESIGN EASE)

Dimension	XS	S	M	L	XL	2XL	3XL
Finished Waist	70 cm	76 cm	82 cm	88 cm	98 cm	108 cm	118 cm
Finished Hip	102 cm	108 cm	114 cm	120 cm	130 cm	140 cm	150 cm
Inseam Length	66 cm	66 cm	66 cm	66 cm	66 cm	66 cm	66 cm

FABRIC REQUIREMENTS (45 IN / 115 CM & 60 IN / 150 CM BOLTS)

Bolt Width	XS	S	M	L	XL	2XL	3XL
45" / 115 cm Fabric	2.85 yd	2.85 yd	2.85 yd	3.3 yd	3.3 yd	3.7 yd	3.7 yd
60" / 150 cm Fabric	2.2 yd	2.2 yd	2.2 yd	2.6 yd	2.6 yd	3.05 yd	3.05 yd

RECOMMENDED FABRICS & STRETCH PROPERTIES

Recommended Substrates: Cotton twill, chino, denim, linen, or wool suiting,
 Pocketing cotton for pocket bags. Stretch Requirement: None 0% stable woven.

NOTIONS & SEWING TOOLS CHECKLIST

- ☐ Matching all-purpose polyester or cotton sewing thread
- ☐ Universal sewing needle size 80/12
- ☐ 7 inch metal or nylon trouser zipper
- ☐ Trouser hook and eye or 18mm button
- ☐ Interfacing for waistband
- ☐ Sharp fabric shears
- ☐ Measuring tape
- ☐ Iron and pressing ham

PATTERN INVENTORY & CUTTING LAYOUT

STANDARD SEAM & HEM ALLOWANCES

Use the seam and hem allowances printed on each pattern piece. Verify every allowance label before cutting fabric.

PATTERN PIECE INVENTORY & CUTTING SCHEDULE

Piece Name	Cut Quantity	Material / Interfacing
Thai Wrap Leg Panel	Cut 1 Pair (1 Left, 1 Right)	Main Fabric
Waist Wrap Tie Belts	Cut 2 Pairs in Self Fabric	Main Fabric

FABRIC PREPARATION & CUTTING RULES

- Press linen, rayon, or cotton fabric before cutting.
- Align piece grainlines strictly parallel to fabric selvages.
- Cut tie belts on straight of grain for strength.

MULTI-PAGE TILE ASSEMBLY INSTRUCTIONS

1. Check Sheet 1 calibration square before printing the remaining pattern sheets.
2. Trim right and bottom border lines along the dashed perimeter frame.
3. Match corner crosshairs, such as A1 to A2 and B1 to B2, without overlapping.
4. Tape sheets securely on both sides before cutting paper pieces.

STEP-BY-STEP SEWING INSTRUCTIONS

Step 1: Hem Wrap Panel Edges

Turn under and stitch a narrow 10 mm double-fold hem along the outer vertical wrap edges and curved waist extensions of both leg panels.

Step 2: Assemble Waist Wrap Tie Belts

Fold each tie belt lengthwise right sides together. Stitch along long edge, turn right side out with a loop turner, press flat, and topstitch.

Step 3: Stitch Continuous Crotch Seam

Place left and right wrap panels right sides together. Stitch continuous center crotch curve from front waist to back waist, reinforcing curve with a second pass.

Step 4: Attach Tie Belts to Waist Corners

Pin prepared tie belts securely to the four outer top corners of the front and back wrap extensions. Stitch and bar-tack securely to reinforce stress points.

Step 5: Hem Leg Openings

Turn up specified 15 mm hem allowance along bottom leg openings. Stitch, give pants a thorough steam press, and try on using authentic Thai wrap-and-tie technique.

TROUBLESHOOTING & PRO SEWING TIPS

Issue: Seams puckering along stitch line

Fix: Insert fresh needle and test balance on fabric scrap.

Issue: Wavy edge along curved perimeter

Fix: Staystitch immediately after cutting and use walking foot.