



Traditional Bog Coat

Traditional Bog Coat Verified open pattern specification

Garment Type: Bog Coat | Difficulty: Beginner | Provenance: Threadline Open Design Studio | License: CC BY-SA 4.0

PRINTER CALIBRATION & SCALE VERIFICATION

Measure both test squares with a rigid ruler before cutting fabric. Print at 100% scale without shrinking.

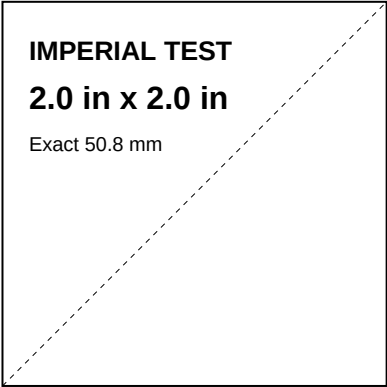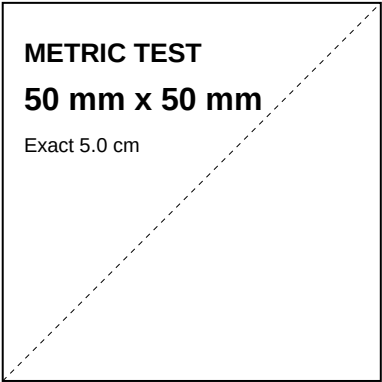

- Scale Rules:
- 1. Open in Acrobat Reader
 - 2. Select Actual Size 100%
 - 3. Do NOT Fit to Page
 - 4. Verify dimensions above

SIZE SELECTION & EASE RECOMMENDATIONS

Select size based on chest measurement, accounting for mid-layer garments.

+16 to +22 cm chest ease for layering over sweaters and hoodies.

STANDARD BODY MEASUREMENTS CHART

Size Range	XS	S	M	L	XL	2XL	3XL
Full Bust/Chest	80 cm	86 cm	92 cm	98 cm	108 cm	118 cm	128 cm
Full Hip / Seat	88 cm	94 cm	100 cm	106 cm	116 cm	126 cm	136 cm

FINISHED MEASUREMENTS & MATERIALS

FINISHED GARMENT MEASUREMENTS (INCLUDES DESIGN EASE)

Dimension	XS	S	M	L	XL	2XL	3XL
Finished Chest	112 cm	118 cm	124 cm	130 cm	140 cm	150 cm	160 cm
Hem Sweep	116 cm	122 cm	128 cm	134 cm	144 cm	154 cm	164 cm
Garment Length	80 cm	82 cm	84 cm	86 cm	88 cm	90 cm	92 cm

FABRIC REQUIREMENTS (45 IN / 115 CM & 60 IN / 150 CM BOLTS)

Bolt Width	XS	S	M	L	XL	2XL	3XL
45" / 115 cm Fabric	2.2 yd	2.2 yd	2.2 yd	2.6 yd	2.6 yd	3.05 yd	3.05 yd
60" / 150 cm Fabric	1.75 yd	1.75 yd	1.75 yd	2.1 yd	2.1 yd	2.5 yd	2.5 yd

RECOMMENDED FABRICS & STRETCH PROPERTIES

Recommended Substrates: Lightweight to medium-weight suitable fabric substrates, Pre-washed natural fibers cotton, linen, or bamboo. Stretch Requirement: None 0% stable woven.

NOTIONS & SEWING TOOLS CHECKLIST

- ☐ Matching all-purpose polyester or cotton sewing thread
- ☐ Universal sewing needle size 80/12
- ☐ Sharp fabric shears
- ☐ Measuring tape
- ☐ Iron and pressing ham

PATTERN INVENTORY & CUTTING LAYOUT

STANDARD SEAM & HEM ALLOWANCES

Use the seam and hem allowances printed on each pattern piece. Verify every allowance label before cutting fabric.

PATTERN PIECE INVENTORY & CUTTING SCHEDULE

Piece Name	Cut Quantity	Material / Interfacing
Haori Front Body	Cut 1 Pair (1 Left, 1 Right)	Main Fabric
Haori Back Body	Cut 1 Pair	Main Fabric
Wide Kimono Sleeve	Cut 1 Pair	Main Fabric
Continuous Neckband	Cut 1 on fold	Main Fabric

FABRIC PREPARATION & CUTTING RULES

- Press fabric before cutting to remove packing folds and pre-shrink fibers.
- Align piece grainlines strictly parallel to fabric selvages.
- Transfer notch markings with small 3 mm snips into the seam allowance margin.

MULTI-PAGE TILE ASSEMBLY INSTRUCTIONS

1. Check Sheet 1 calibration square before printing the remaining pattern sheets.
2. Trim right and bottom border lines along the dashed perimeter frame.
3. Match corner crosshairs, such as A1 to A2 and B1 to B2, without overlapping.
4. Tape sheets securely on both sides before cutting paper pieces.

STEP-BY-STEP SEWING INSTRUCTIONS

Step 1: Fold and Mark Body

Align Haori Front Body and Haori Back Body right sides together along shoulder fold.
Mark underarm and front opening slits with tailor's chalk.

Step 2: Stitch Underarm and Sleeve Seams

Align folded Wide Kimono Sleeve sections right sides together. Stitch underarm seams continuously and press seam allowances open.

Step 3: Attach Continuous Neckband

Fold Continuous Neckband in half lengthwise wrong sides together. Align neckband raw edges to front and neckline opening right sides together, stitch, and press seam allowances.

Step 4: Hem Sleeve Openings and Coat Hem

Turn under 1.5 cm double folded hems on sleeve openings and lower hem perimeter. Press seam allowances and topstitch securely.

TROUBLESHOOTING & PRO SEWING TIPS

Issue: Seams puckering along stitch line

Fix: Insert fresh needle and test balance on fabric scrap.

Issue: Wavy edge along curved perimeter

Fix: Staystitch immediately after cutting and use walking foot.