



Crossbody Studio Sling Bag

Crossbody Studio Sling Bag Verified open pattern specification

Garment Type: Sling Bag | Difficulty: Confident Beginner | Provenance: Threadline Open Design Studio | License: CC BY-SA 4.0

PRINTER CALIBRATION & SCALE VERIFICATION

Measure both test squares with a rigid ruler before cutting fabric. Print at 100% scale without shrinking.

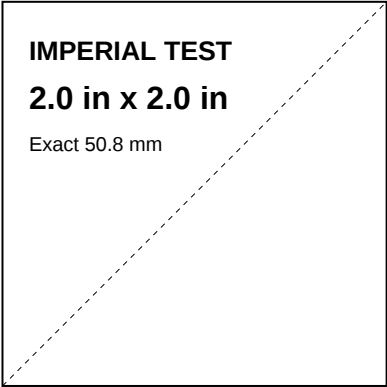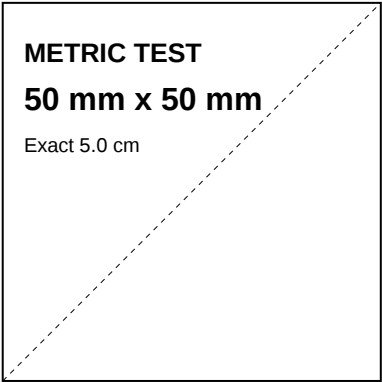

Scale Rules:

- 1. Open in Acrobat Reader
- 2. Select Actual Size 100%
- 3. Do NOT Fit to Page
- 4. Verify dimensions above

SIZE SELECTION & EASE RECOMMENDATIONS

Universal One Size craft pattern with seam allowances included.

Reinforced dimensional structure designed for daily carry utility.

UNIVERSAL FIT / ACCESSORY SPECIFICATION

Universal sizing designed to fit diverse bodies without standard body grading charts. See Page 2.

FINISHED MEASUREMENTS & MATERIALS

FINISHED GARMENT MEASUREMENTS (INCLUDES DESIGN EASE)

Dimension	Universal / One Size
Finished Width	32 cm
Finished Height	42 cm
Finished Depth	10 cm

FABRIC REQUIREMENTS (45 IN / 115 CM & 60 IN / 150 CM BOLTS)

Bolt Width	Universal / One Size
45" / 115 cm Fabric	0.85 yd
60" / 150 cm Fabric	0.75 yd

RECOMMENDED FABRICS & STRETCH PROPERTIES

Recommended Substrates: 10 to 12 oz Cotton canvas, denim, or duck cloth, Quilting cotton lining. Stretch Requirement: None 0% stable woven.

NOTIONS & SEWING TOOLS CHECKLIST

- ☐ Matching all-purpose polyester or cotton sewing thread
- ☐ Universal sewing needle size 80/12
- ☐ Heavy-duty thread
- ☐ Firm fusible craft interfacing
- ☐ 25 cm 10 in nylon coil zipper for main compartment
- ☐ Sharp fabric shears
- ☐ Measuring tape
- ☐ Iron and pressing ham

PATTERN INVENTORY & CUTTING LAYOUT

STANDARD SEAM & HEM ALLOWANCES

Use the seam and hem allowances printed on each pattern piece. Verify every allowance label before cutting fabric.

PATTERN PIECE INVENTORY & CUTTING SCHEDULE

Piece Name	Cut Quantity	Material / Interfacing
Sling Outer Body	Cut 2 in Heavy Canvas	Main Fabric
Sling Lining Body	Cut 2 in Cotton Lining	Main Fabric
Crossbody Strap	Cut 1 in Webbing Strap	Main Fabric

FABRIC PREPARATION & CUTTING RULES

- Press fabric before cutting to remove packing folds and pre-shrink fibers.
- Align piece grainlines strictly parallel to fabric selvages.
- Transfer notch markings with small 3 mm snips into the seam allowance margin.

MULTI-PAGE TILE ASSEMBLY INSTRUCTIONS

1. Check Sheet 1 calibration square before printing the remaining pattern sheets.
2. Trim right and bottom border lines along the dashed perimeter frame.
3. Match corner crosshairs, such as A1 to A2 and B1 to B2, without overlapping.
4. Tape sheets securely on both sides before cutting paper pieces.

STEP-BY-STEP SEWING INSTRUCTIONS

Step 1: Cutting Canvas and Lining

Cut main curved sling bag body pieces from heavy canvas and lining pieces from cotton poplin.

Step 2: Zipper Installation

Install top zipper between front and back upper edges, topstitching along zipper tape.

Step 3: Attach Straps

Stitch webbing strap ends with D-rings into side gusset notches.

Step 4: Bag Construction

Sew outer bag perimeter with right sides facing. Assemble lining leaving turning gap at bottom.

Step 5: Finishing and Topstitching

Insert outer bag into lining, stitch top perimeter, turn through gap, press, and edgestitch opening closed.

TROUBLESHOOTING & PRO SEWING TIPS

Issue: Seams puckering along stitch line

Fix: Insert fresh needle and test balance on fabric scrap.

Issue: Wavy edge along curved perimeter

Fix: Staystitch immediately after cutting and use walking foot.