



Japanese Knot Market Bag

Japanese Knot Market Bag Verified open pattern specification

Garment Type: Market Bag | Difficulty: Beginner | Provenance: Threadline Open Design Studio | License: CC BY-SA 4.0

PRINTER CALIBRATION & SCALE VERIFICATION

Measure both test squares with a rigid ruler before cutting fabric. Print at 100% scale without shrinking.

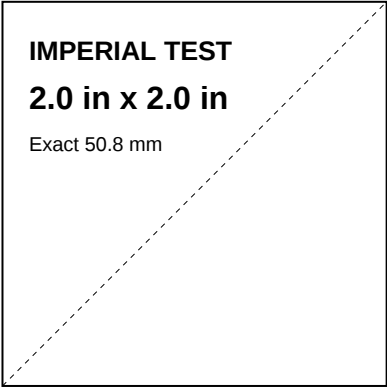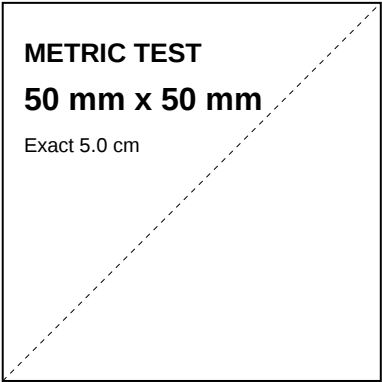

Scale Rules:

- 1. Open in Acrobat Reader
- 2. Select Actual Size 100%
- 3. Do NOT Fit to Page
- 4. Verify dimensions above

SIZE SELECTION & EASE RECOMMENDATIONS

Universal One Size craft pattern with seam allowances included.

Reinforced dimensional structure designed for daily carry utility.

UNIVERSAL FIT / ACCESSORY SPECIFICATION

Universal sizing designed to fit diverse bodies without standard body grading charts. See Page 2.

FINISHED MEASUREMENTS & MATERIALS

FINISHED GARMENT MEASUREMENTS (INCLUDES DESIGN EASE)

Dimension	Universal / One Size
Finished Width	36 cm
Finished Height	46 cm
Finished Depth	8 cm

FABRIC REQUIREMENTS (45 IN / 115 CM & 60 IN / 150 CM BOLTS)

Bolt Width	Universal / One Size
45" / 115 cm Fabric	0.75 yd
60" / 150 cm Fabric	0.65 yd

RECOMMENDED FABRICS & STRETCH PROPERTIES

Recommended Substrates: 10 to 12 oz Cotton canvas, denim, or duck cloth, Quilting cotton lining. Stretch Requirement: None 0% stable woven.

NOTIONS & SEWING TOOLS CHECKLIST

- ☐ Matching all-purpose polyester or cotton sewing thread
- ☐ Universal sewing needle size 80/12
- ☐ Heavy-duty thread
- ☐ Firm fusible craft interfacing
- ☐ Sharp fabric shears
- ☐ Measuring tape
- ☐ Iron and pressing ham

PATTERN INVENTORY & CUTTING LAYOUT

STANDARD SEAM & HEM ALLOWANCES

Use the seam and hem allowances printed on each pattern piece. Verify every allowance label before cutting fabric.

PATTERN PIECE INVENTORY & CUTTING SCHEDULE

Piece Name	Cut Quantity	Material / Interfacing
Knot Bag Outer Body	Cut 2 in Main Fabric	Main Fabric
Knot Bag Lining Body	Cut 2 in Contrast Lining Fabric	Main Fabric

FABRIC PREPARATION & CUTTING RULES

- Press fabric before cutting to remove packing folds and pre-shrink fibers.
- Align piece grainlines strictly parallel to fabric selvages.
- Transfer notch markings with small 3 mm snips into the seam allowance margin.

MULTI-PAGE TILE ASSEMBLY INSTRUCTIONS

1. Check Sheet 1 calibration square before printing the remaining pattern sheets.
2. Trim right and bottom border lines along the dashed perimeter frame.
3. Match corner crosshairs, such as A1 to A2 and B1 to B2, without overlapping.
4. Tape sheets securely on both sides before cutting paper pieces.

STEP-BY-STEP SEWING INSTRUCTIONS

Step 1: Cut Pieces

Cut 2 main exterior bag pieces and 2 lining pieces with asymmetric handle loops.

Step 2: Sew Outer and Lining Bags

Stitch exterior curved lower bag seam right sides facing. Repeat for lining pieces leaving turning gap.

Step 3: Assemble Handles

Nest exterior bag inside lining with right sides facing and pin handle armholes and inner neckline curves.

Step 4: Turn Right Side Out

Stitch handle curves, clip notches along curved seam allowances, and turn right side out through strap openings.

Step 5: Join Handle Tops and Press

Join outer and lining handle top edges, slip-stitch turning gap closed, and press entire bag with steam.

TROUBLESHOOTING & PRO SEWING TIPS

Issue: Seams puckering along stitch line

Fix: Insert fresh needle and test balance on fabric scrap.

Issue: Wavy edge along curved perimeter

Fix: Staystitch immediately after cutting and use walking foot.