



Utility Sewing Machine Cover & Caddy

Utility Sewing Machine Cover & Caddy Verified open pattern specification

Garment Type: Cover & Caddy | Difficulty: Beginner | Provenance: Threadline Open Design Studio | License: CC BY-SA 4.0

PRINTER CALIBRATION & SCALE VERIFICATION

Measure both test squares with a rigid ruler before cutting fabric. Print at 100% scale without shrinking.

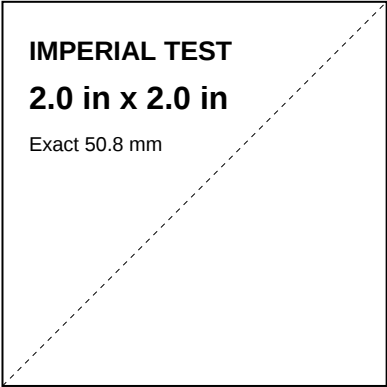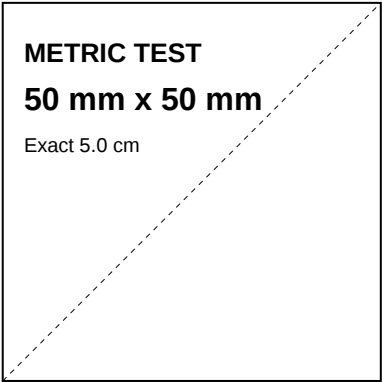

- Scale Rules:**
- 1. Open in Acrobat Reader
 - 2. Select Actual Size 100%
 - 3. Do NOT Fit to Page
 - 4. Verify dimensions above

SIZE SELECTION & EASE RECOMMENDATIONS

Universal One Size craft pattern with seam allowances included.

Reinforced dimensional structure designed for daily carry utility.

UNIVERSAL FIT / ACCESSORY SPECIFICATION

Universal sizing designed to fit diverse bodies without standard body grading charts. See Page 2.

FINISHED MEASUREMENTS & MATERIALS

FINISHED GARMENT MEASUREMENTS (INCLUDES DESIGN EASE)

Dimension	Universal / One Size
Finished Width	46 cm
Finished Height	32 cm
Finished Depth	20 cm

FABRIC REQUIREMENTS (45 IN / 115 CM & 60 IN / 150 CM BOLTS)

Bolt Width	Universal / One Size
45" / 115 cm Fabric	1.3 yd
60" / 150 cm Fabric	1.1 yd

RECOMMENDED FABRICS & STRETCH PROPERTIES

Recommended Substrates: 10 to 12 oz Cotton canvas, denim, or duck cloth, Quilting cotton lining. Stretch Requirement: None 0% stable woven.

NOTIONS & SEWING TOOLS CHECKLIST

- ☐ Matching all-purpose polyester or cotton sewing thread
- ☐ Universal sewing needle size 80/12
- ☐ Heavy-duty thread
- ☐ Firm fusible craft interfacing
- ☐ Sharp fabric shears
- ☐ Measuring tape
- ☐ Iron and pressing ham

PATTERN INVENTORY & CUTTING LAYOUT

STANDARD SEAM & HEM ALLOWANCES

Use the seam and hem allowances printed on each pattern piece. Verify every allowance label before cutting fabric.

PATTERN PIECE INVENTORY & CUTTING SCHEDULE

Piece Name	Cut Quantity	Material / Interfacing
Caddy Outer Cover	Cut 2 in Sturdy Canvas	Main Fabric
Caddy Lining	Cut 2 in Cotton Lining	Main Fabric
Side Tool Pockets	Cut 2 in Canvas	Main Fabric

FABRIC PREPARATION & CUTTING RULES

- Press fabric before cutting to remove packing folds and pre-shrink fibers.
- Align piece grainlines strictly parallel to fabric selvages.
- Transfer notch markings with small 3 mm snips into the seam allowance margin.

MULTI-PAGE TILE ASSEMBLY INSTRUCTIONS

1. Check Sheet 1 calibration square before printing the remaining pattern sheets.
2. Trim right and bottom border lines along the dashed perimeter frame.
3. Match corner crosshairs, such as A1 to A2 and B1 to B2, without overlapping.
4. Tape sheets securely on both sides before cutting paper pieces.

STEP-BY-STEP SEWING INSTRUCTIONS

Step 1: Cutting Heavy Canvas

Cut main cover box panels from sturdy cotton canvas and lining panels from lightweight cotton. Press seam allowances.

Step 2: Notion Pockets

Stitch notion and scissor pockets to front cover exterior panel, dividing into slots with vertical topstitching. Press seam allowances.

Step 3: Box Corner Assembly

Sew box corner seams on exterior canvas to create 3-dimensional rectangular dust cover shape. Press seam allowances.

Step 4: Lining Construction

Repeat box corner assembly for lining cover, leaving 10 cm turning opening on one bottom side. Press seam allowances.

Step 5: Enclose and Finish

Nest exterior into lining right sides facing, stitch bottom perimeter, turn right side out, and edgestitch bottom edge. Press seam allowances.

TROUBLESHOOTING & PRO SEWING TIPS

Issue: Seams puckering along stitch line

Fix: Insert fresh needle and test balance on fabric scrap.

Issue: Wavy edge along curved perimeter

Fix: Staystitch immediately after cutting and use walking foot.