



Quilted Studio Potholder

Square quilted studio potholder with bias binding and hanging loop review draft

Garment Type: Potholder | Difficulty: Beginner | Provenance: Threadline Open Design Studio | License: CC BY-SA 4.0

PRINTER CALIBRATION & SCALE VERIFICATION

Measure both test squares with a rigid ruler before cutting fabric. Print at 100% scale without shrinking.

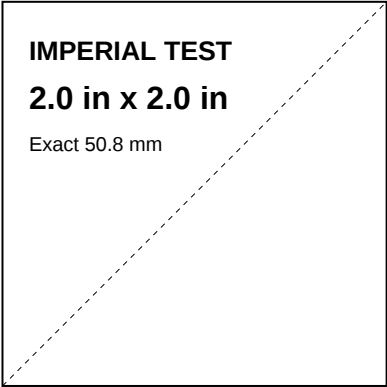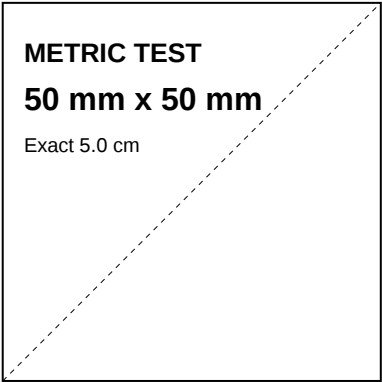

Scale Rules:

- 1. Open in Acrobat Reader
- 2. Select Actual Size 100%
- 3. Do NOT Fit to Page
- 4. Verify dimensions above

SIZE SELECTION & EASE RECOMMENDATIONS

Universal one-size craft pattern with seam allowances included; verify the printed calibration square before cutting.

Not applicable to this non-wearable insulated kitchen accessory.

UNIVERSAL FIT / ACCESSORY SPECIFICATION

Universal sizing designed to fit diverse bodies without standard body grading charts. See Page 2.

FINISHED MEASUREMENTS & MATERIALS

FINISHED GARMENT MEASUREMENTS (INCLUDES DESIGN EASE)

Dimension	Universal / One Size
Finished Width	22 cm
Finished Height	22 cm
Strap Length	-

FABRIC REQUIREMENTS (45 IN / 115 CM & 60 IN / 150 CM BOLTS)

Bolt Width	Universal / One Size
45" / 115 cm Fabric	0.55 yd
60" / 150 cm Fabric	0.55 yd

RECOMMENDED FABRICS & STRETCH PROPERTIES

Recommended Substrates: 10 to 12 oz Cotton canvas, denim, or duck cloth, Quilting cotton lining. Stretch Requirement: None 0% stable woven.

NOTIONS & SEWING TOOLS CHECKLIST

- ☐ Matching all-purpose cotton sewing thread
- ☐ Jeans / denim sewing needle size 90/14
- ☐ Insulating thermal batting core e.g. Insul-Bright or cotton batting
- ☐ Double-fold bias binding tape 50 mm wide, 102 cm length

- ☐ Sharp fabric shears
- ☐ Measuring tape
- ☐ Iron and pressing ham

PATTERN INVENTORY & CUTTING LAYOUT

STANDARD SEAM & HEM ALLOWANCES

Use the seam and hem allowances printed on each pattern piece. Verify every allowance label before cutting fabric.

PATTERN PIECE INVENTORY & CUTTING SCHEDULE

Piece Name	Cut Quantity	Material / Interfacing
Potholder Outer Panels	Cut 2 in Heavy Cotton	Main Fabric
Thermal Batting Core	Cut 2 in Insulating Batting	Main Fabric
Hanging Loop & Bias Trim	Cut 1 Bias Binding Strip	Main Fabric

FABRIC PREPARATION & CUTTING RULES

- Press fabric before cutting to remove packing folds and pre-shrink fibers.
- Align piece grainlines strictly parallel to fabric selvages.
- Transfer notch markings with small 3 mm snips into the seam allowance margin.

MULTI-PAGE TILE ASSEMBLY INSTRUCTIONS

1. Check Sheet 1 calibration square before printing the remaining pattern sheets.
2. Trim right and bottom border lines along the dashed perimeter frame.
3. Match corner crosshairs, such as A1 to A2 and B1 to B2, without overlapping.
4. Tape sheets securely on both sides before cutting paper pieces.

STEP-BY-STEP SEWING INSTRUCTIONS

Step 1: Layer Quilted Sandwich

Layer Potholder Outer Panels right sides facing out with Thermal Batting Core sandwiched securely between them. Pin or baste layers together across perimeter.

Step 2: Quilt Grid Lines

Mark 2.5 cm diagonal diamond grid lines with tailor's chalk. Quilt through all layers with walking foot, and press seam allowances flat.

Step 3: Attach Hanging Loop & Bias Trim

Fold hanging loop strip right sides together, stitch, turn, and baste to upper corner. Encase raw edges with double-fold bias trim right sides together, mitering corners neatly. Press finished potholder.

TROUBLESHOOTING & PRO SEWING TIPS

Issue: Seams puckering along stitch line

Fix: Insert fresh needle and test balance on fabric scrap.

Issue: Wavy edge along curved perimeter

Fix: Staystitch immediately after cutting and use walking foot.